



# A New Never Before Available Fire Protection System For Military & Civilian Government Deployment


## MAX-SUPPRESS™

2.6-GAL (10-LITER)  
• MODEL: MMS-2

3.96-GAL (15-LITER)  
• MODEL: MMS-4

NSN #:

CAGE CODE:

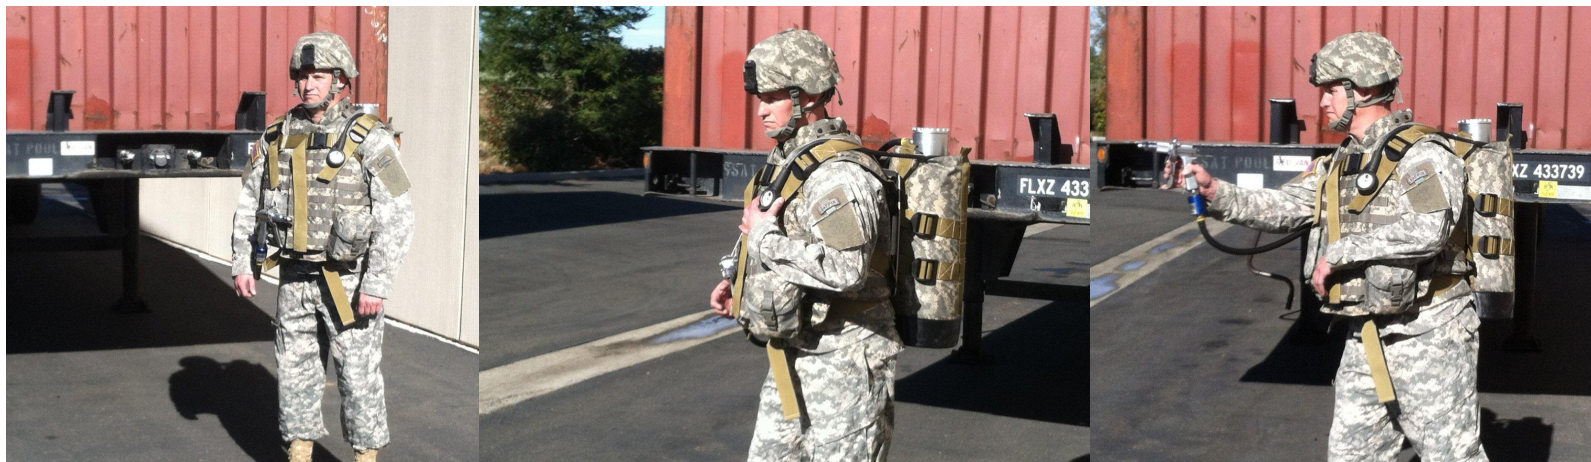

DESCRIPTION	SPECIFICATIONS	ADVANTAGES
<p>Stainless steel construction for durability</p> <p>Light weight backpack designed for ease in deployment</p> <p>Handheld pistol grip stainless steel nozzle gun for ease and accurate use</p>	<p>Tank OP: &gt;165-psi (11.37-Bars)</p> <p>Test Pressure: 600-psi (41.3-Bars)</p> <p>Burst Pressure: 2300-psi (158.5-Bars)</p> <p>Foam Discharge Distance: Approx. 40 to 60-ft (Approx.: 12 to 18-m) per wind condition</p>	<p><i>The FFCs require no special labeling or chronic health hazard warning statements and comply with FHSA regulations, 16 CFR 1500 and California Proposition 65.</i></p>
<p>Recommended Liquid Agent: FireStopper® PFE-FR FFC • All Fire Class Effective: ABCDK Tested &amp; Rated under UL711, ULC, NFPA10, EN3-7</p> <p>Subclass Effective Agent: • Alcohols • Esters • Ethers • Carbon Composites • Rubber • Plastics • Lithium, Sodium Metals, Nuclear Spent Rods, etc.</p>	<p>Air Cylinder (SCUBA) Recharge Time: 2-4 min</p> <p>Foam Discharge Distance: Approx.: 40 to 60-ft (Approx.: 12 to 18-m) depending on wind conditions</p> <p>Agent Temp. Resistant: -100° F (-73°C)</p> <p>Operating Temperature: -59.8° F (-51° C)</p> <p>Approx. Empty Weight (10-Liter): 15-lbs (5.44-kg)</p> <p>Charged: 35-lbs (16-kg)</p>	<p><i>Compatible with all other wet and dry chemicals; Effective on marine fires and will adhere to surfaces such as fiberglass, etc.</i></p> <p>No re-ignition • Non-Irritant (skin or eyes) • Non-Toxic, Non-Aggressive • No Clean-up (Bio-Degradable)</p>
<p>Designed to fire twice allow for quick refill in the field to provide superior fire killing capacity over any other portable system.</p>	<p>Approx. Empty Weight 15-Liter: 22 lbs. (12.2 Kg.)</p> <p>Charged: 45-lbs (20.4-kg)</p>	<p>Limited Warranty: 20-year Onshore &amp; 10-Year for Offshore Use</p>